



RETINOX® 2 plus Chipboard screw

RN 9251




GEOMETRY

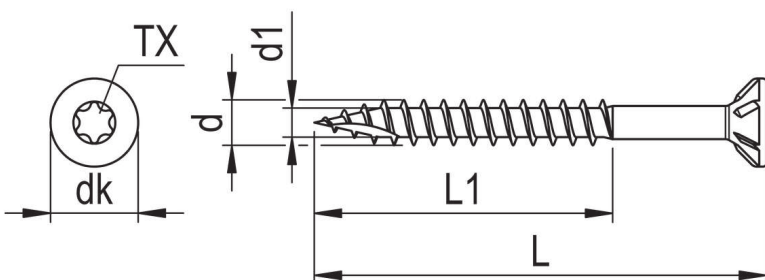

FEATURES

Article number	009251V138-0450504-1
GTIN	4005674019484
Code	01948/4
Material	Stainless steel A2
Surface	pickled, passivated, lubricated
Diameter d	4.5 mm
Length L	50 mm
Core diameter d1	2.6 mm
Thread length L1	31 mm
Head diameter dk	9.0 mm
Approval	EN 14592:2008+A1:2012
Drive type	TX
Drive size	20
Head shape	Countersunk head
Packaging classification	Small pack
Packaging quantity	200
Packaging unit	Pcs.
Packaging size (H x W x D)	77,00 mm x 87,00 mm x 87,00 mm
Net weight	3.40 g
Gross weight	3.60 g

RETINOX® 2 plus Chipboard screw RN 9251

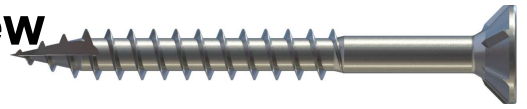

PRODUCT INFORMATION

Partial thread with milling ribs and cutting point.

ADVANTAGES

Product features:

TX

Excellent power transmission
No slipping
Secure processing

Countersunk head with milling ribs

Milling ribs ensure effective milled recessing of the head in the material
Flush countersinking

Single-start thread

High load-bearing capacity

Cutting point

Pre-drills and minimises splitting of the material
Immediate screw start



FIELD OF APPLICATION

For indoor and outdoor wood connections.

Wood constructions, interior construction, gardening and landscaping

PROCESSING

Pre-drilling may be necessary depending on wood quality and application situation.