


											BK 119 Servizio Duty type S1
2	2	105 - 4.13	52 - 2.05	78 - 3.1	675 - 41.2	165 - 10.1	1/4	3,15 - 627	V230 22 V400 12,7	7,5- 5,5	

DATI TECNICI - TECHNICAL DATA



A temperatura ambiente +5°C /+40°C - W ith ambient temperature +41°F /+104°F

	bar 10 psi 145
	l/min 840 cfm 28,9
	r.p.m 1250
	dB-A -

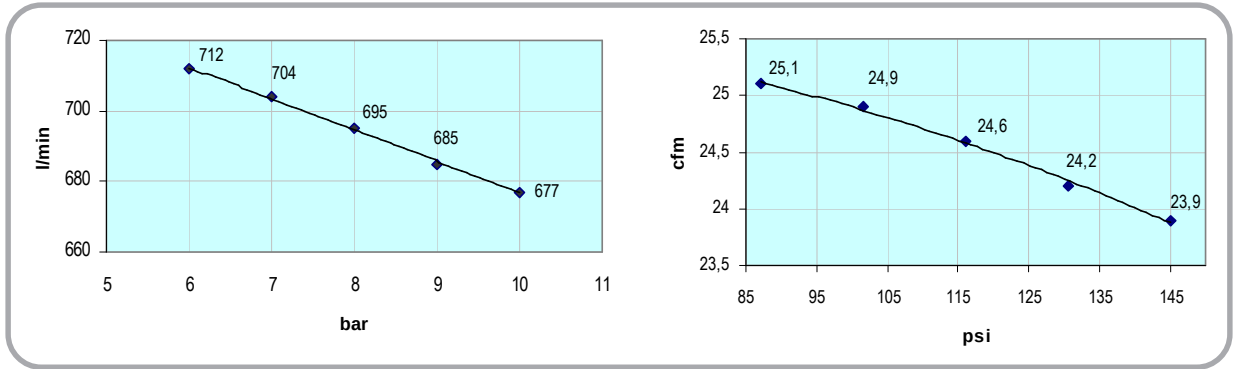

PESI E DIMENSIONI - WEIGHT AND DIMENSIONS

	Kg. 26,5 Lb. 58.8		l 1,34 gal. 0,35
	Kg. 27 Lb. 60		l 0,3 gal. 0.09
	1-SPB or 1-SPZ (su richiesta - on demand)		g/h 1,5 oz/h 0.05

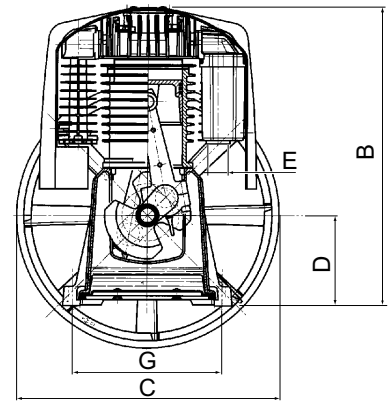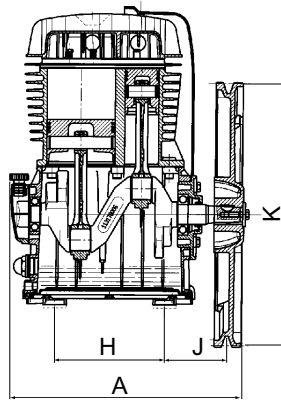

A mm 356,5	inch 14	C mm 402	inch 15.8	E bps R 3/4"	npt	H mm 169	inch 6.6	K mm (Øp) 398	inch (pD) 14.9
B mm 465	inch 18.3	D mm 137	inch 5.4	G mm 229	inch 9	J mm 95,6	inch 3.8		

MOMENTI DI SERRAGGIO - TIGHTENING TORQUE

N° - No	(Nm)
1	45
2	20
3	5,5
4	25
5	28
6	24
7	24

