

TENSTIK E

Guarnizione adesiva in gomma profilata

Self-adhesive profiled rubber gasket



DESCRIZIONE

Guarnizione adesiva in EPDM con profilo ad "E". Tenstik E, aderisce perfettamente ai serramenti in alluminio, legno, porte blindate ed evita correnti d'aria, infiltrazioni di polvere e rumori. Resiste agli agenti atmosferici e agli sbalzi di temperatura: favorisce il risparmio energetico, perché riduce le escursioni termiche mantenendo il benessere della casa.

POSA

La posa è veloce e facile:

1. Pulire le battute del serramento
2. Togliere la carta di protezione
3. Appoggiare e pressare la guarnizione sul serramento

DESCRIPTION

Self-adhesive E-profile gasket in extruded EPDM rubber. Tenstik E has an excellent adhesion on aluminum and wooden frames as well as on reinforced doors. It stops draughts, dust and noise. It is resistant to atmospheric agents and temperature changes: it promotes energy saving because it reduces temperature variations while maintaining the comfort of the house.

INSTALLATION

The installation is quick and easy:


1. Clean the window\door frame
2. Remove the protective paper
3. Place the gasket on the frame and press

Durata: 8 anni

Durability: 8 years

Fessure: 1 – 3.5 mm

Gaps: 1 – 3.5 mm

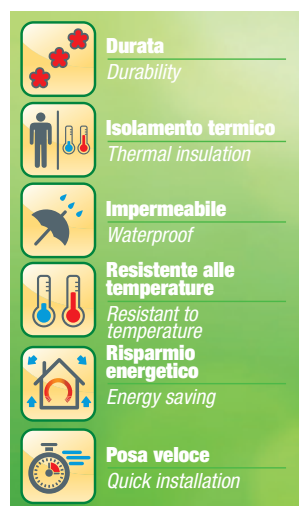

CODICE ART.	CODICE EAN	LARGH.	SPESS.	LUNGH.	COL.	U.M.	QTITA'/	DIM.IMB.	STD	QTITA'/
		mm.	mm.	mt.			imb.	cm.	mag.	minima
P33K0040009B006500	8003202419061	9	4	6	B	NR	32 ast.	41x17x21	X	32 ast.
P33K0040009M006500	8003202419078	9	4	6	M	NR	32 ast.	41x17x21	X	32 ast.
P3300040009B010504	8003202406351	9	4	10	B	NR	24 ast.	43x38x16	X	24 ast.
P3300040009M010504	8003202406368	9	4	10	M	NR	24 ast.	43x38x16	X	24 ast.
P3300040009B050506	8003202420500	9	4	50	B	NR	10 ast.	47x24x44	X	10 ast.

Ad esaurimento